



US007066365B2

(12) **United States Patent**  
**Brown**

(10) **Patent No.:** **US 7,066,365 B2**  
(45) **Date of Patent:** **Jun. 27, 2006**

(54) **TRANSPORTABLE SHOOTING APPARATUS**

(76) Inventor: **Michael S. Brown**, 1599 Manitou Rd., Rochester, NY (US) 14626

(\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 378 days.

(21) Appl. No.: **10/426,267**

(22) Filed: **Apr. 30, 2003**

(65) **Prior Publication Data**

US 2003/0205599 A1 Nov. 6, 2003

**Related U.S. Application Data**

(60) Provisional application No. 60/376,863, filed on May 1, 2002.

(51) **Int. Cl.**  
**B60R 7/00** (2006.01)

(52) **U.S. Cl.** ..... **224/401**; 224/519; 224/525; 42/94

(58) **Field of Classification Search** ..... 224/401, 224/529, 525, 455, 282, 572, 521, 495, 524; 42/94

See application file for complete search history.

(56) **References Cited**

**U.S. PATENT DOCUMENTS**

2,486,161	A *	10/1949	Hughes	280/502
3,220,766	A *	11/1965	Kates	297/184.16
3,528,578	A *	9/1970	Schoenberger	414/462
3,794,227	A *	2/1974	Stearns	224/532
4,614,252	A *	9/1986	Tarner	182/116
4,630,993	A *	12/1986	Jensen	415/58.7
4,937,965	A *	7/1990	Narvaez	42/94
4,951,991	A *	8/1990	Haigler	296/26.09

5,347,740	A *	9/1994	Rather et al.	42/94
5,397,147	A *	3/1995	Ducharme et al.	280/415.1
5,458,389	A *	10/1995	Young	296/26.08
5,836,494	A *	11/1998	Grunsted et al.	224/521
5,974,719	A *	11/1999	Simonek	42/94
6,105,721	A *	8/2000	Haynes	182/127
6,269,578	BI *	8/2001	Callegari	42/94
6,336,413	BI *	1/2002	Ball	108/44
6,378,748	BI *	4/2002	Cox	224/511
6,382,484	BI *	5/2002	Savant	224/401
6,502,730	BI *	1/2003	Johnson	224/519
6,502,771	BI *	1/2003	Wyne	239/663
6,604,606	BI *	8/2003	McDougal et al.	182/127
6,662,983	BI *	12/2003	Lane et al.	224/405
6,684,550	BI *	2/2004	Highfill	42/94
6,808,231	BI *	10/2004	Hill	297/217.7
6,814,503	BI *	11/2004	Hall et al.	385/91
6,871,440	BI *	3/2005	Highfill et al.	42/94
2002/0197466	A1 *	12/2002	Ueno et al.	428/322.2
2004/0164112	A1 *	8/2004	McClain et al.	224/401
2004/0237372	A1 *	12/2004	Frye	42/94

**OTHER PUBLICATIONS**

No Author or Title. Cabela's Master Catalog Spring 2003 Edition I. Cabela's Inc. Sydney, Nebraska. p. 347, Items CD-22-2259-127 Post Mount and CD-22-3856 Post Mount 3/4 cock.

\* cited by examiner



Primary Examiner—T. Mai

(74) Attorney, Agent, or Firm—Patent Innovations LLC; John M. Hammond

(57) **ABSTRACT**

An apparatus, which can be secured to a vehicle, and which can be used to affix, transport, and deploy shooting sports equipment such as a target dispenser, or a gun-sighting bench rest assembly. The apparatus is most commonly secured to and transported by an all-terrain vehicle.

**10 Claims, 8 Drawing Sheets**

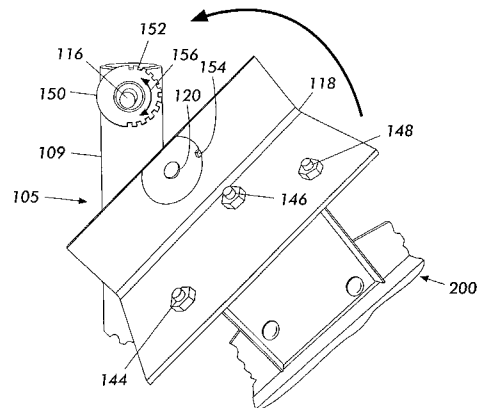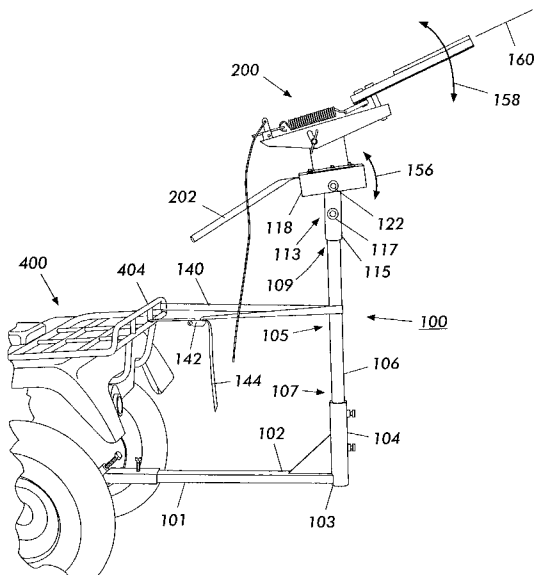

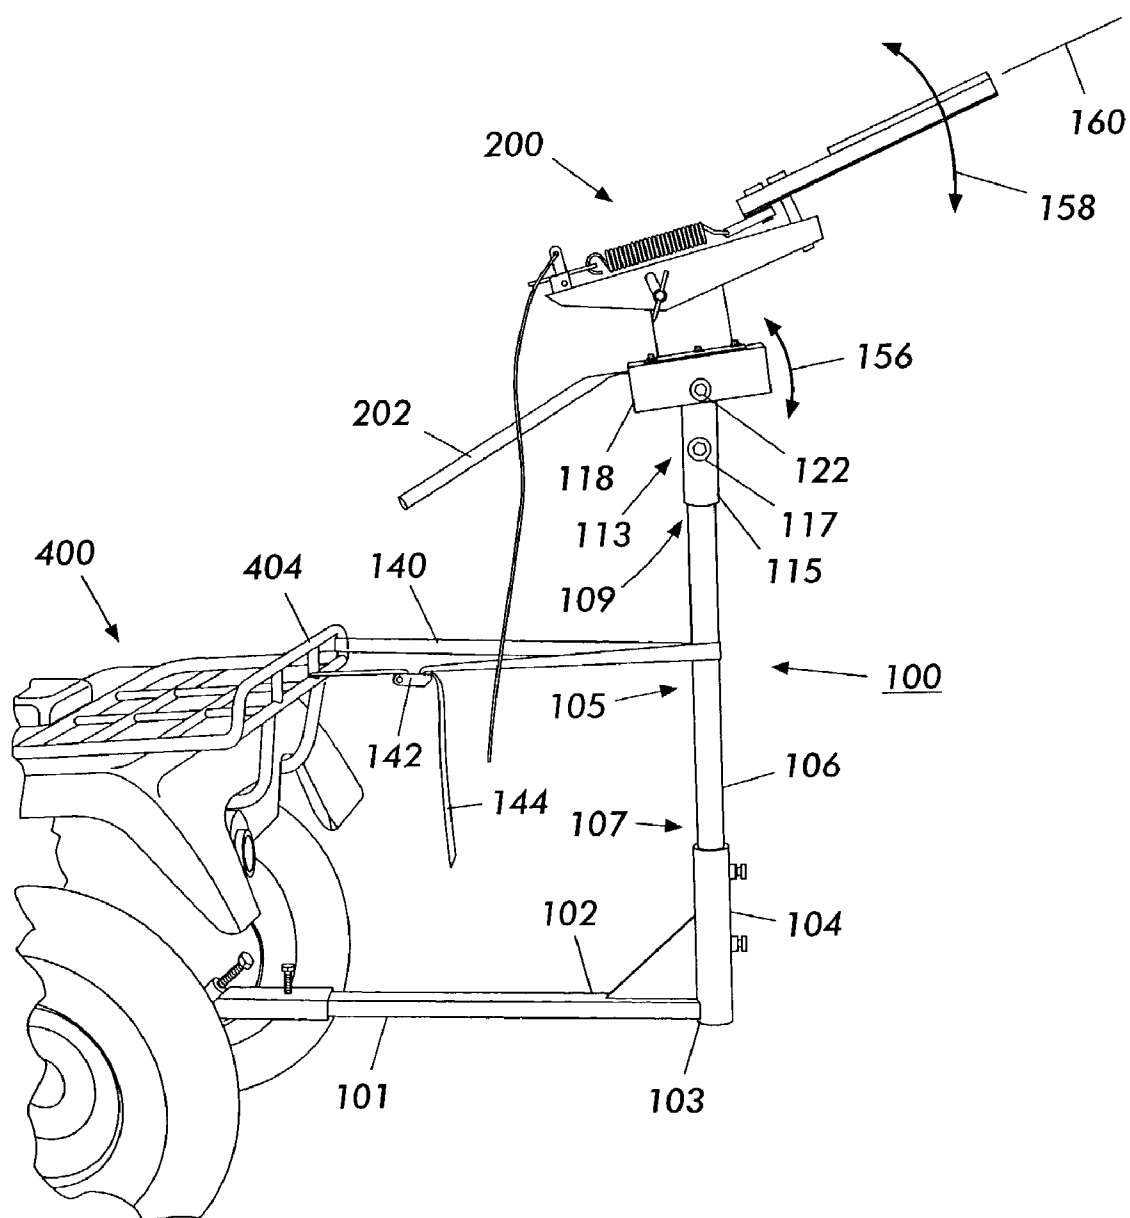


FIG. 1

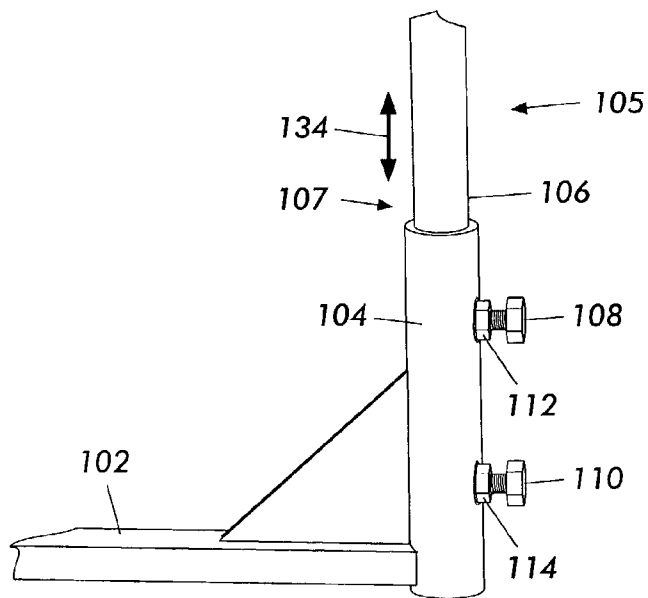


FIG. 2

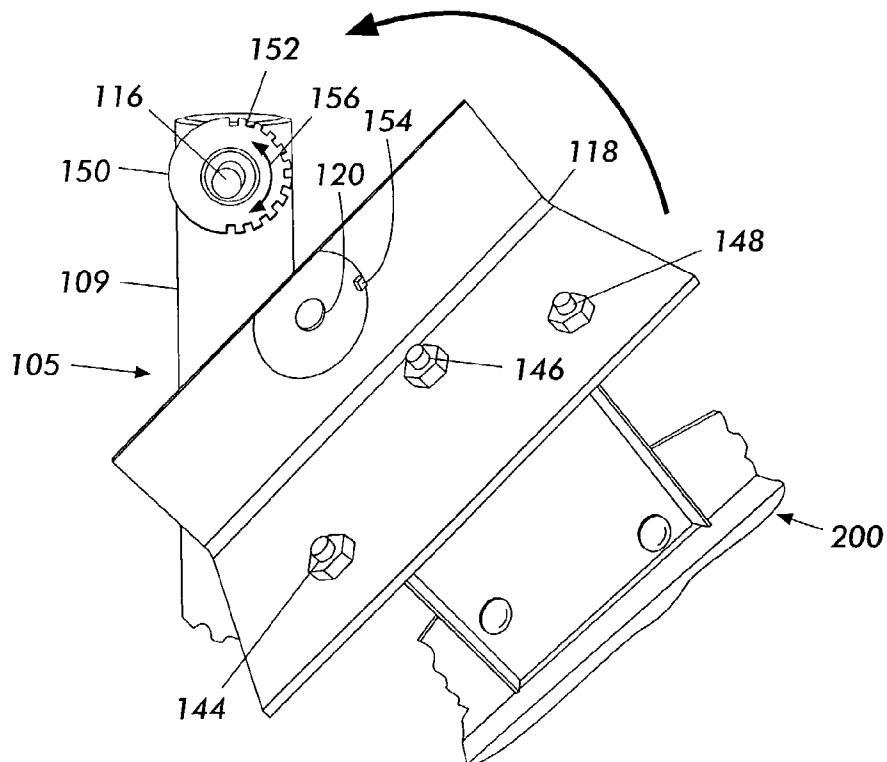


FIG. 3

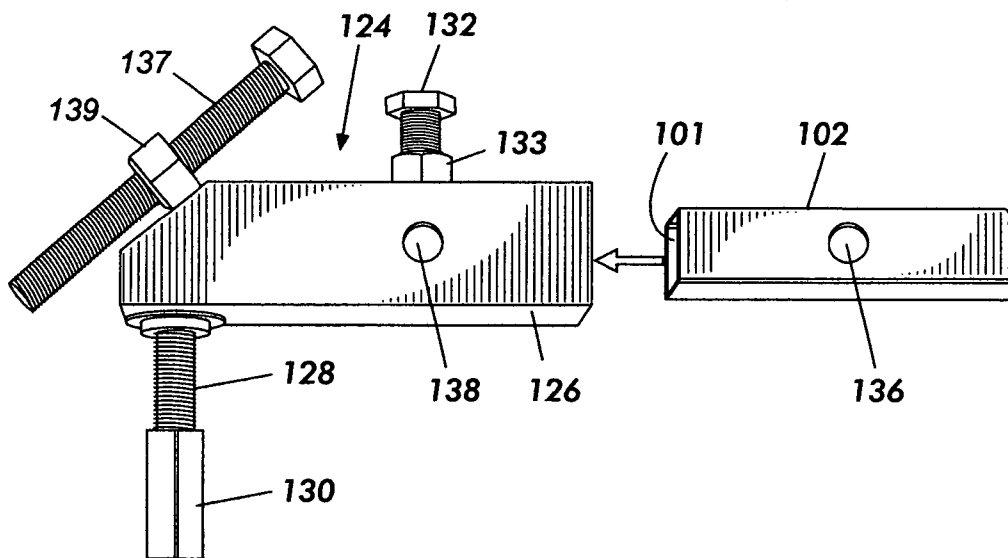


FIG. 4

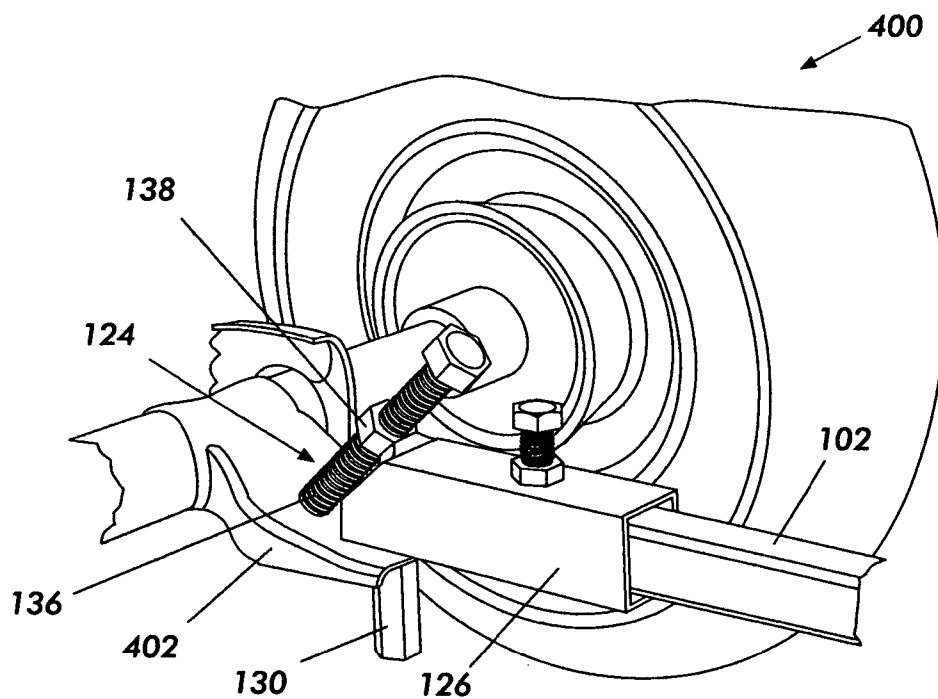


FIG. 5

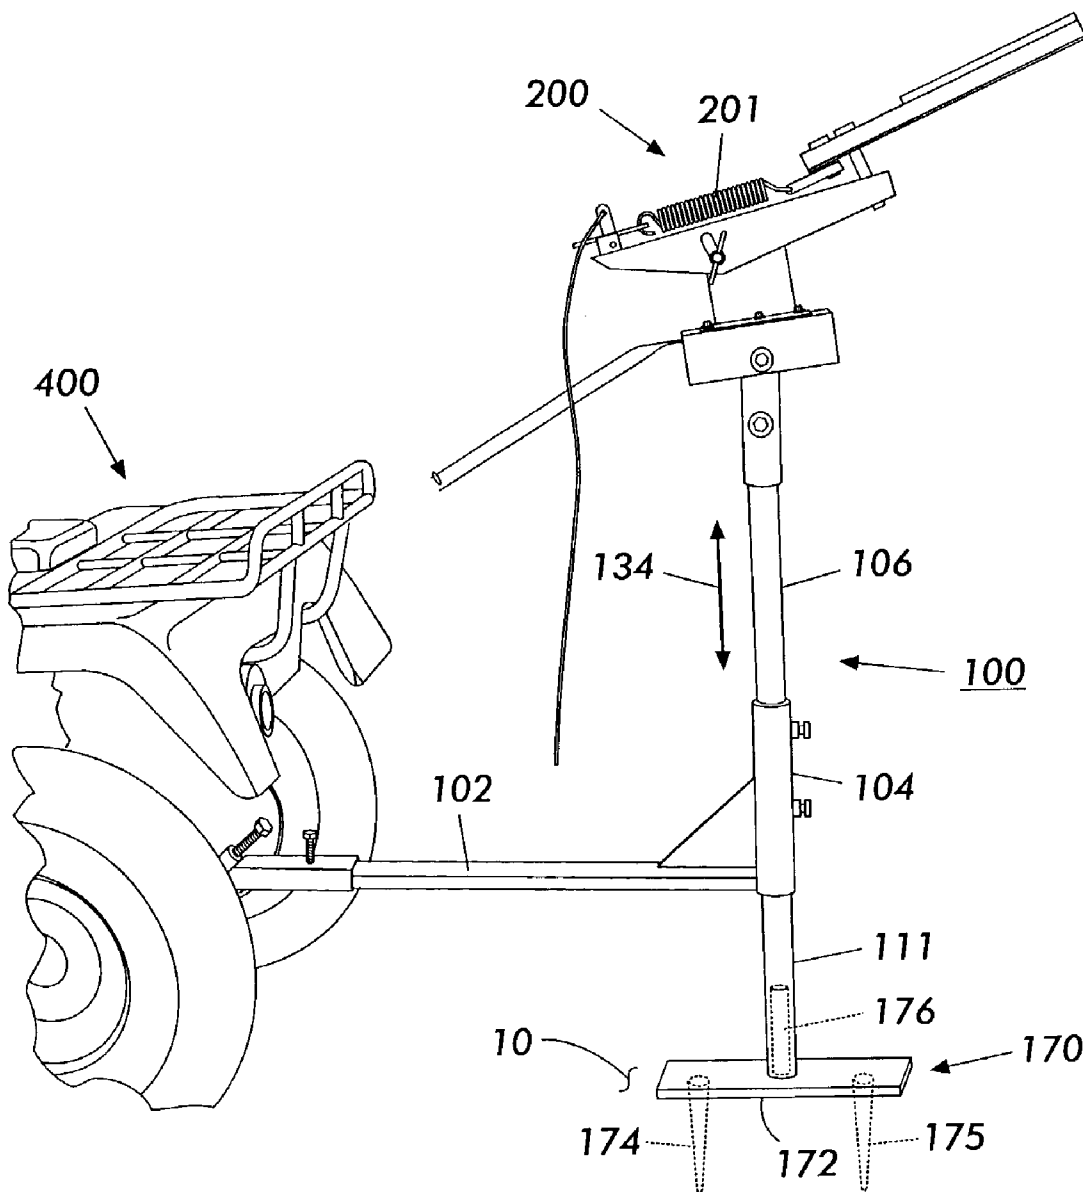
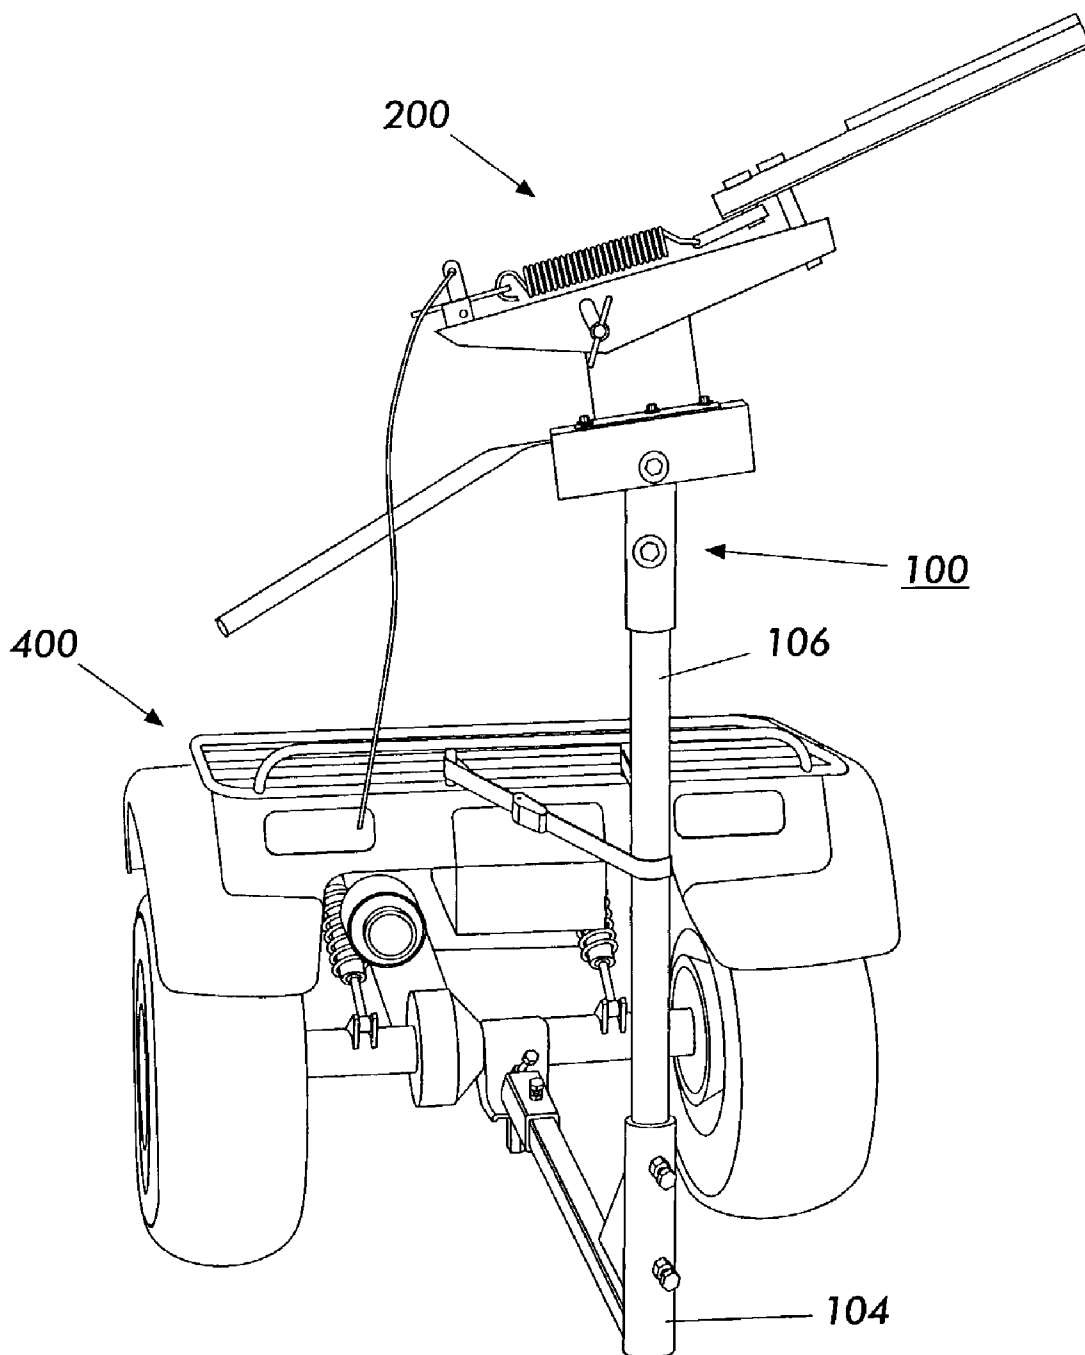


FIG. 6



**FIG. 7**

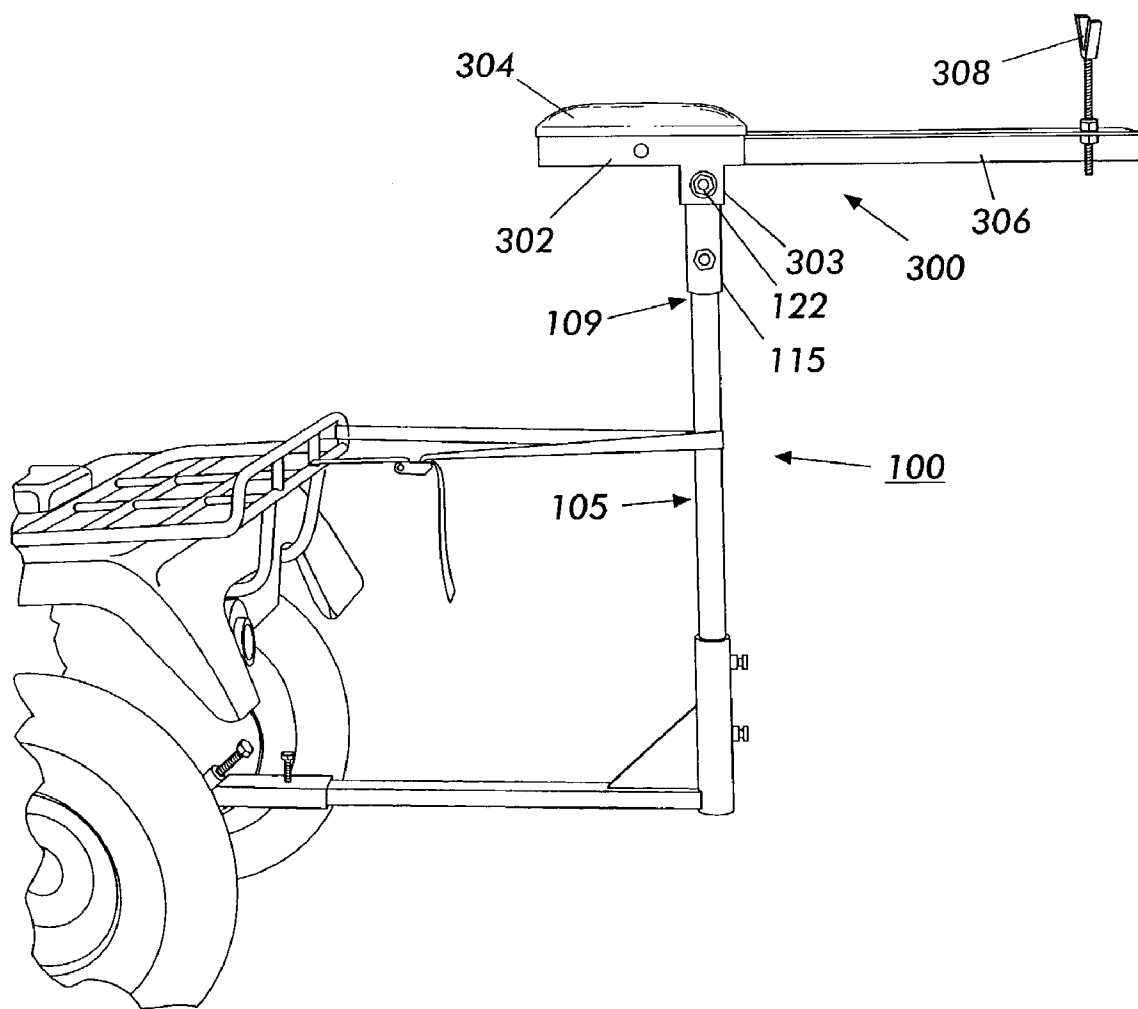


FIG. 8

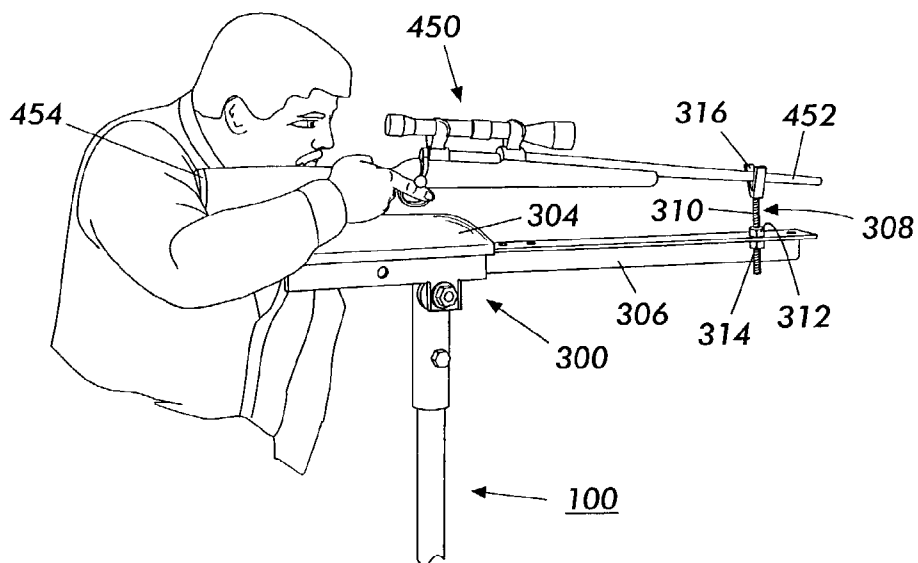


FIG. 9

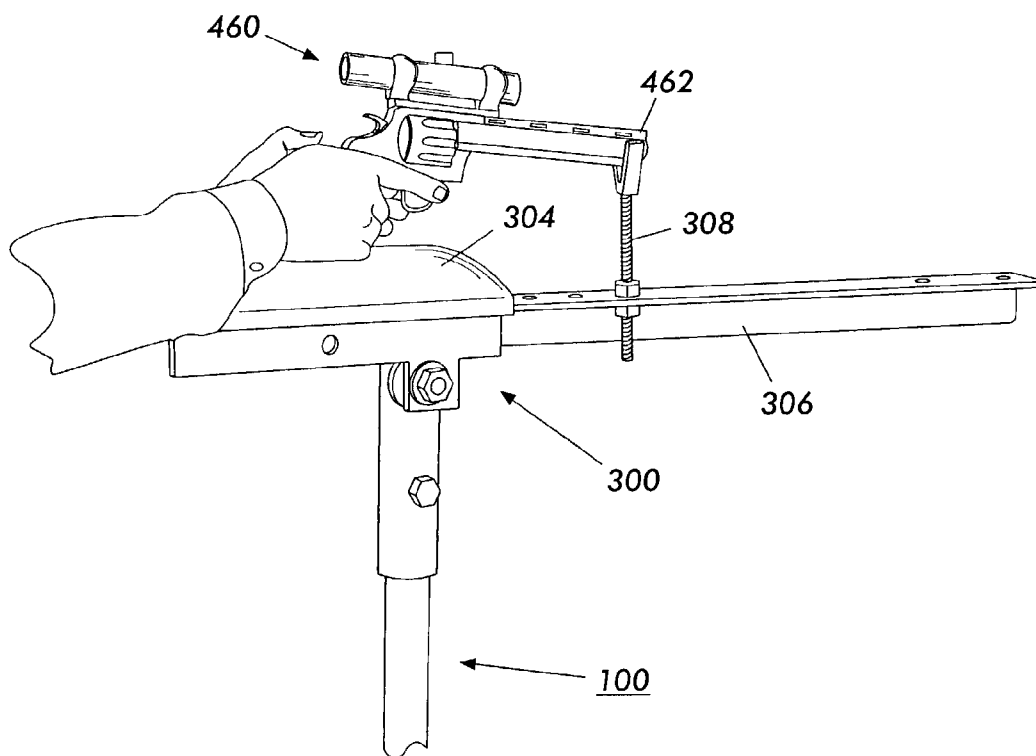


FIG. 10



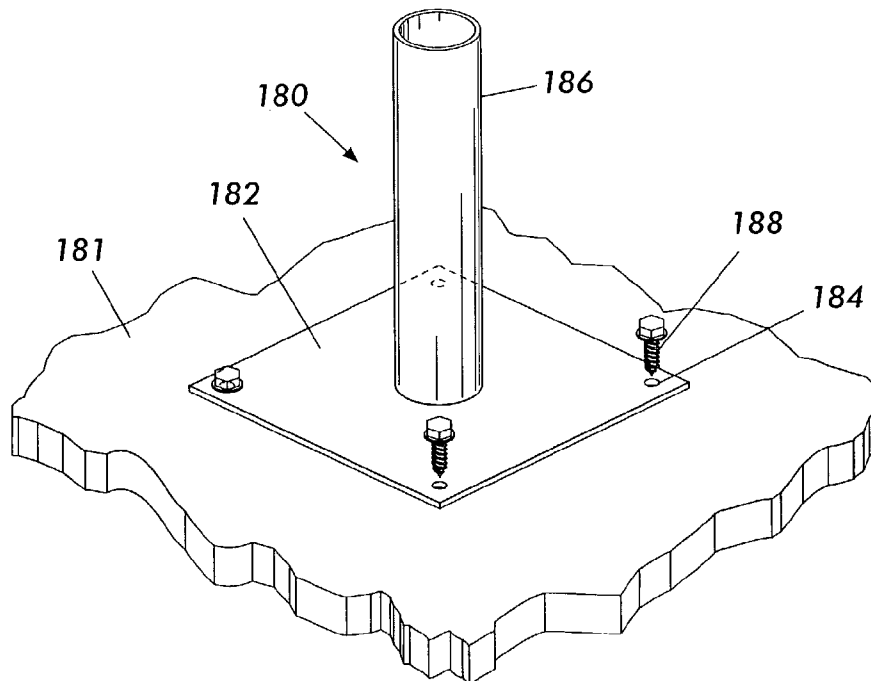


FIG. 11A

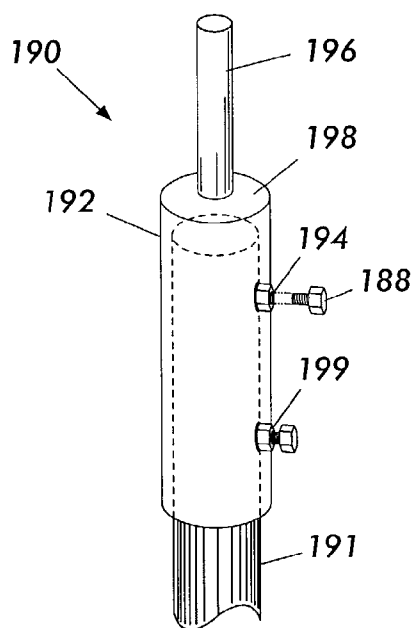


FIG. 11B

**TRANSPORTABLE SHOOTING APPARATUS****CROSS-REFERENCE TO RELATED PATENT APPLICATIONS**

This application claims the benefit of the filing date of U.S. provisional patent application Ser. No. 60/376,863 filed May 1, 2002.

This invention relates generally to outdoor shooting sports, and more particularly to an apparatus for dispensing shooting targets, and an apparatus for measurement and calibration of gun sights.

**BACKGROUND AND SUMMARY OF THE INVENTION**

The present invention is an apparatus, which can be secured to a vehicle, and which can be used to affix, transport, and deploy shooting sports equipment such as a target dispenser, a gun-sighting bench rest assembly, and the like.

Heretofore, a number of patents and publications have disclosed transportable apparatus, which attach to a vehicle, the relevant portions of which may be briefly summarized as follows:

U.S. Pat. No. 6,089,431 to Heyworth, issued Jul. 18, 2000, discloses a transportable hoist apparatus, which attaches to a receiver on a vehicle.

U.S. Pat. No. Des. 407,135 to DeWitt, issued Mar. 23, 1999, discloses a transportable clay pigeon launcher support device, which attaches to a receiver on a vehicle, and which comprises a square tube, and a rotatable platform.

U.S. Pat. No. 5,397,147 to Ducharme et al., issued Mar. 14, 1995, discloses a transportable work table apparatus, which attaches to a receiver on a vehicle, and which comprises a square tube, and a fixed platform.

U.S. Pat. No. 2,925,077 to Leubkeman, issued Feb. 16, 1960, discloses a target-dispensing device, which is attachable to a fixed object, such as a post.

In accordance with the present invention, there is provided an apparatus for affixing, transporting, and deploying shooting sports equipment with a vehicle, comprising: a receiver bar having a first end and a second end, the first end being attachable to a vehicle; a riser comprising a lower section and an upper section, said riser being attachable at the lower section to the second end of said receiver bar; wherein the upper section of said riser further comprises a joining feature for affixing said shooting sports equipment to said riser.

In accordance with another aspect of the present invention, there is provided an apparatus for affixing, transporting, and deploying a target dispenser with a vehicle, comprising: a receiver bar having a first end and a second end, the first end being attachable to a vehicle; a riser having a lower section and an upper section, the lower section being attachable to the second end of said receiver bar; and a target dispenser attached to the upper section of said riser.

In accordance with another aspect of the present invention, there is provided an apparatus for affixing, transporting, and deploying a gun-sighting bench rest with a vehicle, comprising a receiver bar comprising a first end and a second end, attachable at said first end to a vehicle; a riser comprising a lower section and an upper section, attachable at said lower section to said second end of said receiver bar; and a gun-sighting bench rest attached to said upper section of said riser.

One aspect of the invention is based on the observation of problems with conventional techniques of affixing, transporting, and deploying shooting sports equipment in remote outdoor locations. To the best of the applicant's knowledge, no one single device offers the capability of effectively accomplishing all three objectives of affixing, transporting, and deploying equipment.

In many instances, it is desirable to transport such equipment into areas, which are substantially inaccessible with large vehicles and conventional equipment transporting means. The present invention enables fast and simple affixing of such equipment to a vehicle that is capable of accessing remote terrain, e.g. an all terrain vehicle. Furthermore, such equipment is frequently secured at the remote site to such objects as a vehicle spare tire and the like, as means to affix and immobilize the equipment. For example, the practice of attaching a target dispenser (used in dispensing skeet or trap shooting targets) to the spare tire of a vehicle (detached and lying on the ground) is generally unsatisfactory. A typical spare tire is not a satisfactory base, because it is not heavy enough to withstand the recoil of the target dispenser during target ejection, and thus it allows the dispenser to wobble uncontrollably during and after ejection. Any attempt to add weight to the spare tire, e.g. filling it with water, renders the spare tire generally unsatisfactory for its intended purpose.

The apparatus of the present invention can include a receiver bar, attachable to a vehicle; a riser, attachable to the receiver bar; and a joining feature for affixing shooting sports equipment to the riser.

The technique described above is advantageous because it enables fast and easy affixing of shooting sports equipment to a vehicle, ease of transportation of the equipment with the vehicle, and ease of deployment and use of the equipment upon arrival of the vehicle and equipment at the desired destination.

It is therefore an object of this invention to provide an apparatus for affixing, transporting, and deploying shooting sports equipment with a vehicle.

It is a further object of this invention to provide an apparatus for affixing, transporting, and deploying a target dispenser with a vehicle.

It is an additional object of this invention to provide an apparatus for affixing, transporting, and deploying a gun-sighting bench rest with a vehicle.

**BRIEF DESCRIPTION OF THE DRAWINGS**

The invention will be described by reference to the following drawings, in which like numerals refer to like elements, and in which:

FIG. 1 is a side elevation view of one embodiment of the apparatus of the present invention, comprising a receiver bar, a riser, and a target dispenser;

FIG. 2 is a side elevation view of means to attach the riser of the apparatus to the receiver bar of the apparatus;

FIG. 3 is a detailed view of one joining feature for affixing equipment to the riser of the apparatus of the present invention;

FIG. 4 is a side elevation view of receiver means for attaching the apparatus of the present invention to a vehicle;

FIG. 5 is a perspective view of receiver means for attaching the apparatus of the present invention to a vehicle;

FIG. 6 is a side elevation view of one embodiment of the apparatus of the present invention, comprising a receiver

bar, a riser, and a target dispenser, wherein the target dispenser is deployed in a more stable configuration for the dispensing of targets;

FIG. 7 is an elevation view of one embodiment of the apparatus of the present invention, comprising a receiver bar, a riser, and a target dispenser, taken in the forward direction of the vehicle;

FIG. 8 is a side elevation view of another embodiment of the apparatus of the present invention, comprising a receiver bar, a riser, and a gun-sighting bench rest;

FIG. 9 is a side elevation view of the embodiment of FIG. 8, shown in use in the sighting of a long gun;

FIG. 10 is a side elevation view of the embodiment of FIG. 8, shown in use in the sighting of a sidearm;

FIG. 11A is a perspective view of a platform attachment base for securing the transportable shooting apparatus to a flat surface; and

FIG. 11B is a perspective view of a tubular attachment base for securing the transportable shooting apparatus to a post.

The present invention will be described in connection with a preferred embodiment, however, it will be understood that there is no intent to limit the invention to the embodiment described. On the contrary, the intent is to cover all alternatives, modifications, and equivalents as may be included within the spirit and scope of the invention as defined by the appended claims.

#### DESCRIPTION OF THE PREFERRED EMBODIMENT

For a general understanding of the present invention, reference is made to the drawings. In the drawings, like reference numerals have been used throughout to designate identical elements. In describing the present invention, the following terms have been used in the description: A target dispensing device is meant to describe any device that can throw, fling, or otherwise discharge a target object into a spatial volume, where a shooter may discharge a firearm at such object while it is in flight. Such target dispensing devices are typically used in the practice of skeet and trap shooting, wherein such targets are typically substantially disc shaped, made of ceramic composition, and often referred to as clay pigeons. A firearm is meant to describe any gun in general. A long gun is meant to describe a firearm comprising a long-barrel (i.e. a barrel of a length more than approximately twenty times its outside diameter); and a stock which is generally placed against the shoulder of the shooter, such as a shotgun, a rifle, a muzzle-loader, and the like. A sidearm is meant to describe a firearm comprising a short barrel (i.e. a barrel of a length less than approximately ten times its outside diameter), and a stock which is generally gripped with one hand of the shooter, and which is carried in a side holster, or concealed and carried in a body holster. A sidearm may be e.g. a pistol, a handgun, a derringer, and the like. Gun sighting is meant to indicate the practice of aiming a firearm, or the practice of calibrating the alignment of the mechanical or optical means, which is provided proximate to a gun barrel to ensure the accuracy of a gunshot.

Referring to FIG. 1, and in one embodiment, the applicant's transportable shooting device 100 comprises receiver bar 102, and riser 105. Receiver bar 102 comprises a first end 101, which is attachable to vehicle 400, and a second end 103, which is attachable to riser 105. In one embodiment, end 103 of receiver bar 102 comprises riser sleeve 104, and riser 105 comprises a lower section 107, wherein

the outside dimensions of lower section 107 and the inside dimensions of riser sleeve 104 are such that a sliding fit of lower section 107 inside of riser sleeve 104 is attained.

FIG. 2 is a side elevation view of means to attach the riser 105 of the apparatus to the receiver bar 102 of the apparatus. Referring to FIG. 2, lower section 107 of riser 105 is engaged in riser sleeve 104. Riser sleeve upper locking bolt 108 and riser sleeve lower locking bolt 110 are threadedly engaged with riser sleeve upper locking nut 112 and riser sleeve lower locking nut 114 respectively. Riser sleeve locking bolts 108 and 110 extend through holes (not shown) in riser sleeve 104, such that the tips (not shown) of riser sleeve locking bolts 108 and 110 also engage the outer surface of lower section 107 of riser 105, when riser sleeve locking bolts 108 and 110 are tightened. Accordingly, riser 105 is immobilized and secured to receiver bar 102 when riser sleeve locking bolts 108 and 110 are tightened.

Riser sleeve upper locking nut 112 and riser sleeve lower locking nut 114 of FIG. 2 are joined to riser sleeve 104 preferably by welding. Riser sleeve upper locking nut 112 and riser sleeve lower locking nut 114 provide threads with which to engage riser sleeve locking bolts 108 and 110 to riser sleeve 104. Alternatively, if riser sleeve 104 is of sufficient wall thickness such that riser sleeve 104 may be tapped with threads, riser sleeve locking bolts 108 and 110 may be threadedly engaged directly with riser sleeve 104.

Riser 105 further comprises a joining feature at the upper section 109 of riser 105. Referring to FIG. 3, and in one embodiment, riser 105 comprises stud 116, which is suitably joined to upper section 109 of riser 105. Stud 116 is preferably joined to upper section 109 of riser 105 by welding, brazing or equivalent joining methods. Alternatively, stud 116 may be threadedly engaged with upper section 109 of riser 105, into a correspondingly threaded hole (not shown) into upper section 109.

In one embodiment shown in FIG. 1, upper section 109 of riser 105 comprises a platform knuckle 113 having a sleeve 115, which fits over riser tube 106. Platform knuckle 113 further comprises threadedly engaged locking bolt and nut 117, which is used to secure platform knuckle 113 to riser tube 106, as was previously described for the securing of riser tube 106 within riser sleeve 104. Stud 116 (see FIG. 3) is joined to sleeve 115 of platform knuckle 113 as previously described.

Various shooting sports equipment, or other equipment may be attached to the joining feature at upper section 109 of riser 105. Referring again to FIG. 3, and in the embodiment in which said joining feature is stud 116, a platform 118 may be joined to the upper section 109 of riser 105. In FIG. 3 platform 118 comprises a short section of angle iron. Platform 118 is shown in FIG. 3 as detached from upper section 109 of riser 105, and inverted. To join platform 118 to upper section 109 of riser 105, platform 118 is turned over, and stud 116 is directed through hole 120 of platform 118. Referring to FIG. 1, platform 118 is shown joined to upper section 109 of riser 105, and secured with platform nut 122.

In one embodiment, the apparatus of the present invention further comprises receiver means, which is suitably attached to the vehicle that is transporting the apparatus. FIG. 4 depicts receiver means for attaching the apparatus of the present invention to an all-terrain vehicle, which comprises a hitch plate 402 (see FIG. 5). Referring to FIG. 4, receiver means 124 comprises receiver socket 126, receiver stud 128, receiver nut 130, receiver lock bolt 132, and receiver lock nut 133.

5

Receiver socket **126** comprises a hollow cross section, and is typically fabricated from a short section of tubing. In one embodiment, receiver socket **126** is made of tubing having a square cross section. Receiver bar **102** comprises a square cross section, which achieves a sliding fit within receiver socket **126** when the end **101** of receiver bar **102** is engaged with receiver socket **126**. Receiver locking bolt **132** is threadedly engaged with receiver locking nut **133**, and with receiver bar **102**, in the same manner in which riser tube lock bolt **108** is engaged with riser tube lock nut **112** (see FIG. 2), as previously described in this specification.

Referring again to FIG. 4, in a one embodiment, receiver bar **102** comprises a hole **136** drilled through the cross section thereof, and receiver socket **126** comprises a hole **138** drilled through the cross section thereof. When receiver bar **102** is engaged with receiver socket **126**, a pin (not shown) may be inserted through the pair of aligned holes **136** and **138**, thereby engaging receiver bar **102** with receiver socket **126**. This method of engaging a receiver bar with a receiver socket is widely practiced in the art of automotive towing of trailers and the like.

FIG. 5 shows the receiver means of FIG. 4, attached to an all-terrain vehicle. Referring to FIG. 5, all-terrain vehicle **400** comprises hitch plate **402**, which further comprises a hole therethrough (obscured by receiver socket **126**). Receiver stud **128** (see FIG. 4) is engaged with the hole in hitch plate **402**, and receiver nut **130** is threadedly engaged with receiver stud **128**, which reversibly attaches receiver socket **126** and receiver bar **102** to all-terrain vehicle **400**.

In the embodiment shown in FIG. 5, receiver means **124** further comprises angle adjustment bolt **137** and guide nut **139**, which is suitably joined to receiver socket **126**. In operation, angle adjustment bolt **137** is threadedly engaged with guide nut **139**, and is tightened against hitch plate **402** of vehicle **400**. In performing such tightening, angle adjustment bolt **137** on receiver means **124** provides adjustment of the angle at which apparatus **100** is transported, with respect to vehicle **400**.

In an alternative embodiment, the apparatus of the present invention may be provided with additional means to secure it to a vehicle. Referring to FIG. 1, strap **140** is looped around riser **105**, through one or more bars of cargo rack **404** of vehicle **400**, and joined to itself through buckle **142**. Strap end **144** is tightened through buckle **142** to remove all slack from strap **140**, thereby securing transportable shooting apparatus **100** more forcibly to the vehicle **400**.

FIG. 1 is a side elevation view of one embodiment of the apparatus of the present invention, comprising a target dispenser. Referring to FIG. 1, target dispenser **200** is joined to platform **118** of shooting apparatus **100**. In one embodiment, target-dispensing apparatus **200** is joined to platform **118** by nut-and-bolt fasteners **144**, **146**, and **148** of FIG. 3, wherein platform **118** and shooting apparatus **200** are shown detached from upper section **109** of riser **105**, and inverted.

In one embodiment, the transportable shooting apparatus **100** of FIG. 1 is deployed for use as shown, i.e. in the same condition in which it is transported. All-terrain vehicle **400** is of sufficient weight to absorb the recoil reaction resulting from the dispensation of a target by shooting apparatus **200**. However, in some situations, such as all-terrain vehicle being of light weight, or being a three-wheeled vehicle, features of the present invention that improve the stability thereof are preferred.

FIG. 6 is a side elevation view of one embodiment of the apparatus of the present invention, comprising a receiver bar, a riser, and a target dispenser, wherein the riser further comprises anchoring features such that the apparatus is

6

deployed in a more stable configuration for the dispensing of targets. Referring to FIG. 6, apparatus **100** is deployed with the bottom end **111** of riser tube **106** lowered, as indicated by arrow **134**, such that the bottom end **111** thereof is in contact with ground **10**. In one alternative embodiment (not shown) bottom end **111** is provided with a point that may be embedded into the ground. Riser tube upper lock bolt **108** and lower lock bolt **110** (see FIG. 2) are tightened against riser tube **106** as described previously in this specification, to secure riser tube **106** in the deployed position.

In a preferred embodiment, apparatus **100** is provided with an anchor plate assembly **170**, which is fitted to bottom end **111** of riser tube **106**. Anchor plate assembly **170** comprises plate **172**, to the bottom side of which are joined spikes **174** and **175** by suitable means such as e.g., welding. Anchor plate assembly **170** further comprises post **176** joined to the top side of plate **172**, and substantially perpendicular to plate **172**. In one embodiment, anchor plate assembly **170** was fabricated of carbon steel, with plate **172** being 0.25 inches thick, 4 inches wide, and 12 inches long; spikes **174** and **175** being 6 inches long; and post **176** being 1 inch in diameter and 3 inches long.

In use, anchor plate assembly **170** is placed in contact with ground **10** directly beneath bottom end **111** of riser tube **106**, and further depressed (typically by the user's foot) such that spikes **174** and **175** (shown in phantom) are driven into ground **10**. Riser tube **106** is then lowered such that post **176** is disposed within and engaged with bottom end **111** of riser tube **106**. As a result of such engagement, apparatus **100** is anchored to ground **10** in a manner that resists any torque of apparatus **100** around riser **106**, or around receiver stud **128** (see FIG. 4) when a target is ejected by target dispenser **200**. Thus, substantially all of the potential energy that is stored in spring **201** of cocked target dispenser **200** (not shown) is converted into kinetic energy of the target (not shown) when such target is dispensed. In a further embodiment, anchor plate may be reversibly joined to bottom end **111** of riser tube **106** by suitable means such as a threaded engagement therewith (not shown), or by a pin (not shown). It is strongly preferred that any such joining is reversible so that at any time, riser tube **106** may be withdrawn completely through sleeve **104** in the event that apparatus **100** is to be dismantled.

The transportable shooting apparatus of the present invention is preferably provided with several additional features, which enable the simple adjustment of the apparatus in order to obtain optimum performance from the equipment attached thereto. For example, and referring again to FIG. 1, riser tube **106** of apparatus **100** is preferably a cylindrical tube, and riser sleeve **104** is preferably a cylindrical sleeve. Accordingly, riser tube upper locking bolt **108** and riser tube lower locking bolt **110** of FIG. 2 are loosened, and riser tube **106** is swiveled in riser sleeve **104** to a desired alternative position, whereupon riser tube upper locking bolt **108** and riser tube lower locking bolt **110** are tightened, securing the shooting apparatus in the alternative position. FIG. 7 depicts one example of the shooting apparatus **100** swiveled and secured in an alternative position.

A further adjustment feature provides for the adjustment of the angle of the platform of the shooting apparatus. In one embodiment shown in FIG. 3, upper section **109** of riser **105** is provided with toothed washer **150**, which is joined to upper section **109** of riser **105** by suitable means such as welding. Toothed washer **150** is substantially concentric with stud **116**, and toothed washer **150** is provided with a plurality of teeth that are substantially identical to tooth **152**, around at least a portion of the circumference thereof.

Platform **118** is provided with locating pin **154** for engagement with tooth **152** and an adjacent tooth, or with other pairs of teeth, when platform **118** is secured to upper section **109** of riser **105**.

The engagement of pin **154** with toothed washer **150** is therefore incrementally adjustable along an arc represented by arcuate arrow **156** of FIG. 3. Referring to FIG. 1, the position of platform **118** is correspondingly adjustable along the arc represented by arcuate arrow **156**. Such adjustability of platform **118** enables the corresponding adjustment of the plane (indicated by line **160**) in which targets are discharged from the target dispenser **200**, through a range of positions partially indicated by arcuate arrow **158**. Such adjustability is desirable to the user, because it enables the simulation of the flight trajectories of a variety of flushed game birds, from those having a substantially vertical flight path to those having a substantially horizontal flight path.

The adjustability of platform **118** by the engagement of a toothed washer with a pin is incremental as presently described, and shown in FIGS. 1 and 3. However, it will be apparent to those skilled in the art that there are many mechanisms known in the mechanical arts for providing continuous adjustability of a platform that is secured to a riser. It is to be understood, therefore, that such continuous adjustability is encompassed by the present invention.

FIG. 8 is a side elevation view of another embodiment of the apparatus of the present invention, comprising a gun-sighting bench rest. Referring to FIG. 8, gun-sighting bench rest **300** of transportable shooting apparatus **100** comprises base **302**, gunstock pad **304**, gun barrel support bar **306**, and gun barrel support V-rest **308**. Base **302** further comprises mounting tab **303**, through which is provided a hole (not shown), such that base **302** is secured to upper section **109** of riser **105** using nut **122**, as was described for the securing of platform **118** to upper section **109**, and shown in FIG. 1.

FIG. 9 is a side elevation view of the embodiment of FIG. 8, shown in use in the sighting of a long gun. Referring to FIG. 9, long gun **450** is positioned with barrel **452** resting in V-rest **308**, and gunstock **454** resting on pad **304**. The height of V-rest **308** is made adjustable by the provision of threaded rod **310**, on which locking nuts **312** and **314** are threadedly engaged.

FIG. 10 is a side elevation view of the embodiment of FIG. 8, shown in use in the sighting of a sidearm. Referring to FIG. 10; sidearm **460** is positioned with barrel **462** resting in V-rest **308**, and gunstock (concealed by shooter's hands) resting on pad **304**. The location of V-rest **308** upon barrel support bar **306** has been adjusted to accommodate the short length of the barrel **462** of sidearm **460**. In one embodiment, the adjustability of the position of V-rest **308** upon barrel support bar **306** is provided by a series of holes (not shown) drilled along the length of barrel support bar **306**. In another embodiment, the adjustability of the position of V-rest **308** upon barrel support bar **306** is provided by a slot (not shown) milled along the length of barrel support bar **306**.

The structural components of the apparatus of the present invention may be made of any suitable materials of construction known in the mechanical arts. Such materials are preferably inexpensive, readily available from common industrial supply wholesalers, and sufficiently lightweight such that one person may assemble the apparatus in its various configurations. For example, the apparatus may comprise components made of steel, aluminum, plastic, composite materials such as fiber-reinforced polymer, and the like.

In the embodiment shown in FIG. 1, receiver bar **102** was made of 1.5 inch square steel tubing with a 0.25 inch wall

thickness. Riser sleeve **104** was made of steel tubing 2.375 inches in outside diameter, 2.00 inches in inside diameter, and 12 inches in length. Platform knuckle sleeve **115** is made of steel tubing 2.375 inches in outside diameter, 2.00 inches in inside diameter, and 6.0 inches in length. Riser tube **106** is made of steel tubing 1.875 inches in outside diameter, 1.50 inches in inside diameter, and approximately 43.0 inches in length. Platform **118** is made of steel angle iron stock, 3.25 inches on its short side, 5.00 inches on its long side, 0.25 inches thick, and 9 inches long. Stud **116** of FIG. 3 is 0.625 inch in diameter, one inch in length, and threaded with  $\frac{5}{8}$ -11 UNC threads. It is noted that 1.5 inch square steel tubing is preferred for receiver bar **102**, because Class 1 receiver hitches commonly used in automotive towing applications comprise square sockets 1.5 inches in cross section. Accordingly, the embodiment of the present invention shown in FIG. 1 and described above can be attached to any vehicle comprising a Class 1 receiver hitch.

In the embodiment shown in FIG. 9, bench rest assembly **308** was made of a platform of steel angle iron stock, 3.0 inches on its short side, 4.0 inches on its long side, 0.25 inches thick, 12 inches long, and padded with vinyl-covered foam padding. Barrel support bar **306** was made of steel angle iron stock, 2.0 inches on each side, 0.125 inches thick, and approximately 24 inches long. V-rest **308** was made of V-block **316** threadedly engaged with threaded rod **310**, which was made of  $\frac{3}{8}$ -16 UNC threaded rod, approximately 6 inches in length.

In a further embodiment, the apparatus of the present invention comprises attachment base means for attachment to an immobile surface, instead of means for attachment to a vehicle. FIG. 11A is a perspective view of a platform attachment base for securing the transportable shooting apparatus to a flat and approximately horizontal surface. Referring to FIG. 11A, platform attachment base **180** comprises flat plate **182** to which is joined riser **186** by suitable means, preferably by welding. A plurality of holes **184** are provided through plate **182**, such that screws **188** may be used to secure plate **182** to flat surface **181**, such as e.g., a table top, a stump, and the like. Riser **186** is disposed substantially vertically and perpendicular to plate **182**, and serves as an alternative mounting riser, in lieu of riser **105** of FIG. 1, to which is mounted target dispenser **200** by engagement with sleeve **115**; or riser **105** of FIG. 8, to which is mounted gun-sighting bench rest **300** by engagement with sleeve **115**.

Plate **182** is preferably between about 20 and 150 square inches in area and between about  $\frac{1}{8}$  inch and about  $\frac{1}{2}$  inch in thickness. Riser **186** is preferably between about 6 inches and 18 inches in length, with an outside diameter slightly less than the inside diameter of the corresponding sleeve **115** of apparatus **100** or apparatus **300**, and with a wall thickness sufficient to rigidly hold apparatus **100** or **300** in place and absorb the recoil of a target dispensation, or a firing gun. In one preferred embodiment, platform attachment base **180** was fabricated of carbon steel, wherein plate **182** was made of a 6 inch by 6 inch by  $\frac{1}{4}$  inch thick plate, and riser **186** was made of a 12 inch length of 1.5 inch Schedule 40 steel pipe.

FIG. 11B is a perspective view of a tubular attachment base for securing the transportable shooting apparatus to a post surface, such as e.g., a sawed-off tree trunk, a cylindrical post, a square post, and the like. Referring to FIG. 11B, tubular attachment base **190** comprises sleeve **192**, to which is joined cap **198** and riser **196**, preferably by welding. A plurality of holes **194** are provided through sleeve **192**, such that screws **188** (see FIG. 11A) may be used to secure sleeve **192** to post **191**. In a further embodiment, nuts

199 are welded to sleeve 192, and provided with bolts 188 such that bolts 188 are engaged with post 191, in a manner similar to that described previously in this specification. Riser 196 is substantially coaxial with sleeve 192, and serves as an alternative mounting riser, instead of riser 105 of FIG. 1, to which is mounted target dispenser 200 by engagement with sleeve 115; or riser 105 of FIG. 8, to which is mounted gun-sighting bench rest 300 by engagement with sleeve 115. It will be apparent that the dimensions of riser 196 and sleeve 115 may be chosen such that riser 196 is either a solid bar or a hollow riser tube, wherein sleeve 115 is engaged with the outer surface of riser 196, or sleeve 115 may be contained within riser 196, wherein riser 196 is a hollow tube or pipe.

In the embodiment depicted in FIG. 11B, the immobile surface is depicted as being formed by a cylindrical post 191. Alternatively, post 191 could be a square post such as a pressure-treated 4-inch by 4-inch post, and sleeve 192 could be formed of square tubing. In the following description, there is no intent to limit the scope of the invention to solely embodiments comprising a cylindrical sleeve.

Referring to FIG. 11B, and in the embodiment depicted therein, sleeve 192 is preferably between about 3 and about 7 inches in diameter, and between about 6 inches and about 12 inches in length. Generally, 3-inch, 4-inch, or 6-inch Schedule 80 steel pipe is suitable for fabrication of sleeve 192. Suitable materials and dimensions for riser 196 are as recited for riser 186 of FIG. 11A. In one preferred embodiment, tubular attachment base 190 was fabricated of carbon steel, wherein sleeve 192 was made of 4-inch Schedule 40 pipe 8 inches in length, cap 192 was made of 1/4 inch thick steel plate, and riser 192 was fabricated as recited for riser 182 of FIG. 11A.

In recapitulation, the present invention is an apparatus, which can be secured to a vehicle, and which can be used to affix, transport, and deploy shooting sports equipment such as a target dispenser, a gun-sighting bench rest assembly, and the like. While this invention has been described in conjunction with preferred embodiments thereof, it is evident that many alternatives, modifications, and variations will be apparent to those skilled in the art. Accordingly, it is intended to embrace all such alternatives, modifications and variations that fall within the spirit and broad scope of the appended claims.

The invention claimed is:

1. An apparatus for affixing, transporting, and deploying shooting sports equipment with a vehicle, comprising:

- a. a receiver bar having a first end and a second end, said first end being attachable to a vehicle;

- b. a riser comprising a lower section and an upper section, said riser being attachable at said lower section to said second end of said receiver bar, and said riser further comprising a washer joined to said upper section, and a threaded stud joined to said upper section and extending outwardly through said washer, said washer comprising a plurality of teeth formed around at least a portion of the perimeter of said washer, and

- c. a platform comprising a first section disposed vertically and including a hole therethrough and a pin protruding outwardly therefrom, and a second section, wherein said threaded stud of said riser passes through said hole, said washer is contiguous with a surface of said first section of said platform, said platform is secured to said riser by a nut engaged with said threaded stud of said riser, and said pin protruding outwardly from said first section is engageable between any adjacent pair of said teeth of said washer.

2. The apparatus as recited in claim 1, further comprising a target dispenser attached to said second section of said platform.

3. The apparatus as recited in claim 1, wherein said receiver bar comprises a vertically disposed sleeve joined to said second end thereof, and said lower section of said riser is disposed within said sleeve.

4. The apparatus as recited in claim 3, wherein said lower section of said riser comprises a pointed end.

5. The apparatus as recited in claim 3, wherein an anchor plate assembly comprising a plate and at least one spike protruding downwardly from said plate is engaged with said lower section of said riser.

6. The apparatus as recited in claim 1, further comprising a receiver socket that is engageable with said first end of said receiver bar.

7. The apparatus as recited in claim 1, wherein said apparatus further comprises a bench rest.

8. The apparatus as recited in claim 7, wherein said bench rest further comprises a base joined to said riser and a support bar joined to said base.

9. The apparatus as recited in claim 8, wherein said bench rest further comprises a pad disposed upon said base, and a V-rest joined to said support bar.

10. The apparatus as recited in claim 6, wherein said receiver socket further comprises a receiver stud joined thereto, and a nut threadedly engaged with said receiver stud.

\* \* \* \* \*